
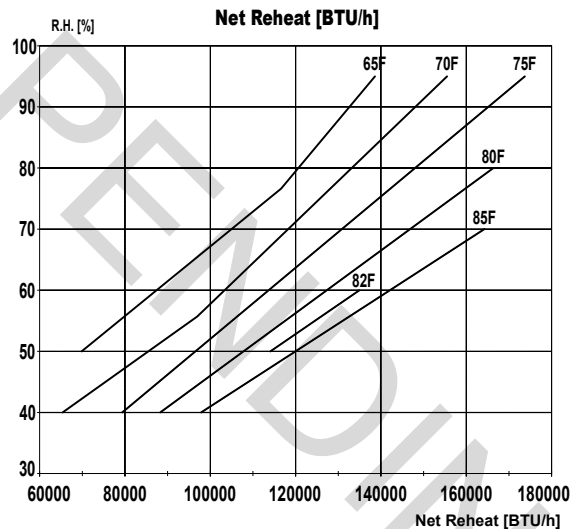
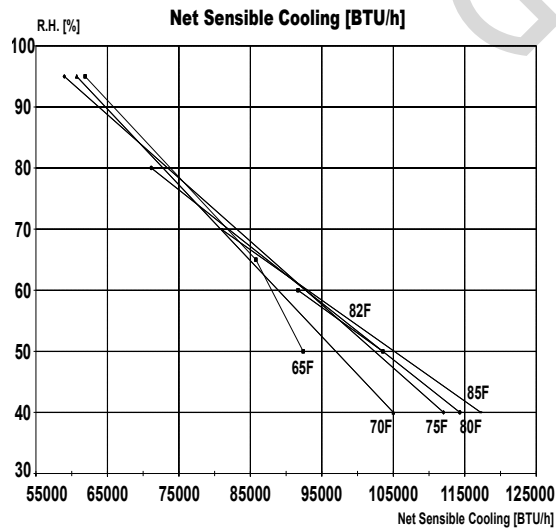


**DCA 7000Y AIR COOLED - NON WATER HEATING DEHUMIDIFIER**

**DCA 7000YWH WATER HEATING ASSIST DEHUMIDIFIER**

**PERFORMANCE**

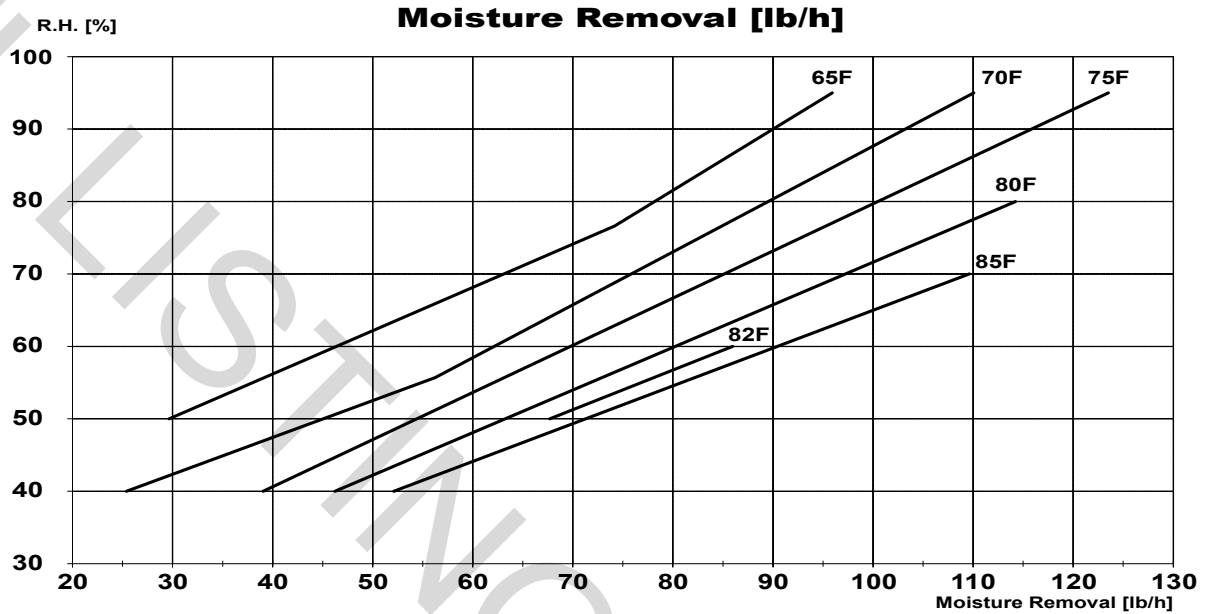

Performance	82DB / 50% R.H.	82DB / 60% R.H.	Notes
Moisture Removal, LB/HR	67.7	86.0	1
Net Sensible Cooling, MBH	103.5	91.7	2
Net Reheat, MBH	114.1	135.0	3
Water Heating, MBH (Water Heating Models Only)	219.2	227.6	4

- Notes:
1. Reheat mode assuming 1050 BTU/lb
  2. Cooling mode with remote condenser at 95F.
  3. Defined as sum of latent and compressor input. Use dehumidifier for supplemental heat only.
  4. Assuming 85F entering water temperature.
  5. For conditions and data not shown contact the factory

CAUTIONS: The reheat capacity rating includes latent recovery and heat of compression. It is recommended that dehumidifier be used for supplemental heat only. The cooling capacity is based on an ambient temperature of 95°F. As outside conditions vary, so will the performance of the dehumidifier. Ratings are subject to change without notice.

## DCA 7000Y AIR COOLED - NON WATER HEATING DEHUMIDIFIER

## DCA 7000YWH WATER HEATING ASSIST

### DESIGN SPECIFICATIONS

Electrical	208/230V	460V	575V
Phase/Hz	3/60	3/60	3/60
Compressor B.T.U.	184,000	185,500	185,500
Compressor RLA	49.0	24.0	19.2
Compressor LRA	386.3	182	131
Blower Motor HP	5	5	5
Blower Motor FLA	14.0	6.7	5.0
Unit FLA	64.7	31.5	24.9
Maximum Fuse Size	110	50	40
Minimum Circuit Ampacity	77.0	37.5	29.7
Operating KW	17.85	17.66	17.42

CFM.....	7000
External Static Pressure.....	1.00" H <sub>2</sub> O
Refrigerant.....	R-454B (Factory Charged 80 lbs.)
Compressor Type.....	Scroll
Filter (Quantity: 4).....	20" x 25" x 4" Pleated
Drain Connection.....	1" Bar Drain
DCA 7000Y Weight.....	1600 lbs.
DCA 7000YWH Weight.....	1880 lbs.
Liquid Inlet [inches O.D.] (up to 50') <sup>1</sup> .....	0.875
Hot Gas Outlet [inches O.D.] (up to 50') <sup>1</sup> .....	1.375
Water Inlet [inches O.D.].....	1.625
Water Outlet [inches O.D.].....	1.625
Water Flow G.P.M. <sup>2</sup> .....	33.0
Pressure Drop (Ft. WC) <sup>2</sup> .....	11.5

<sup>1</sup> Over 50ft contact factory

<sup>2</sup> Water Flow data based on 60% RH + Return Air 82°F and Pool Water at 85°F

### STANDARD FEATURES

- Listed To UL 60335-2-40
- 3 Year Part Warranty
- Single Refrigeration Circuit
- Single Scroll Compressor
- Powder Coated, Galvannealed Steel Cabinet
- Low Ambient Head Pressure Control
- Remote Condenser Ready
- Rifle Tube Refrigeration Coils
- TEFC Blower Motor
- Stainless Steel Condensate Drain Pan
- Standard Microprocessor Control System
- Motorized Evaporator Bypass Damper
- ElectroFin Coated Coils

### OPTIONAL FEATURES

- Right Side Component Service Access
- Top or Bottom Discharge (Not Field Convertible)
- Outdoor Installation Package
- Outdoor Make Up Air Assembly with Damper & Filter
- External Static Upgrade
- Water Cooled Condenser For Water Heating Or A/C
- Remote Ready Delete
- Defrost Timer Package
- Control Options
- Space Heating Options Available
- Other Options Available