
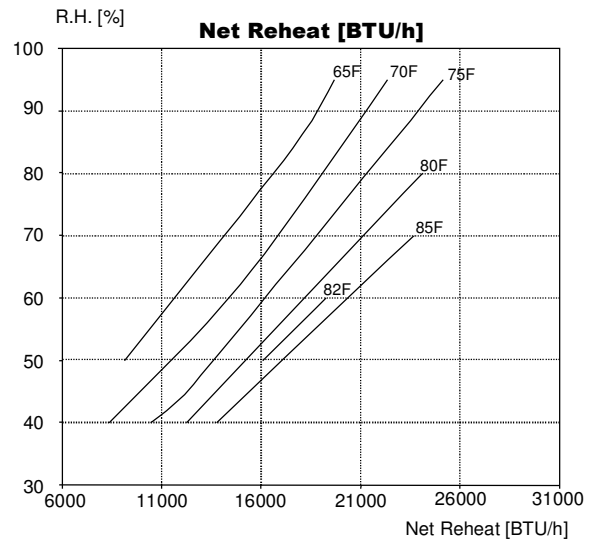
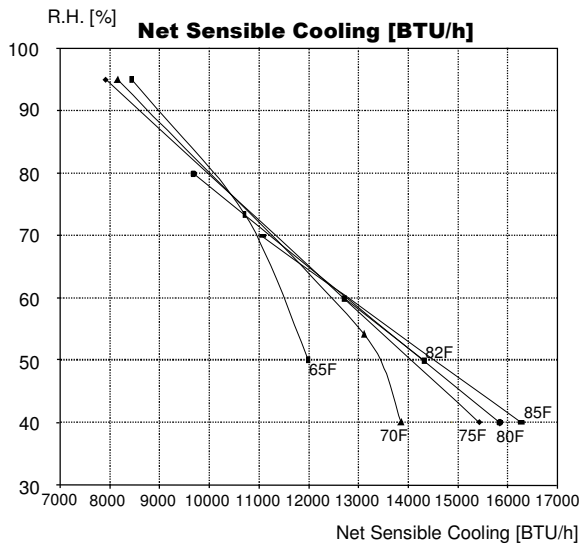


DCA 900TV AIR COOLED - NON WATER HEATING DEHUMIDIFIER

DCA 900TVWH WATER HEATING ASSIST DEHUMIDIFIER

PERFORMANCE

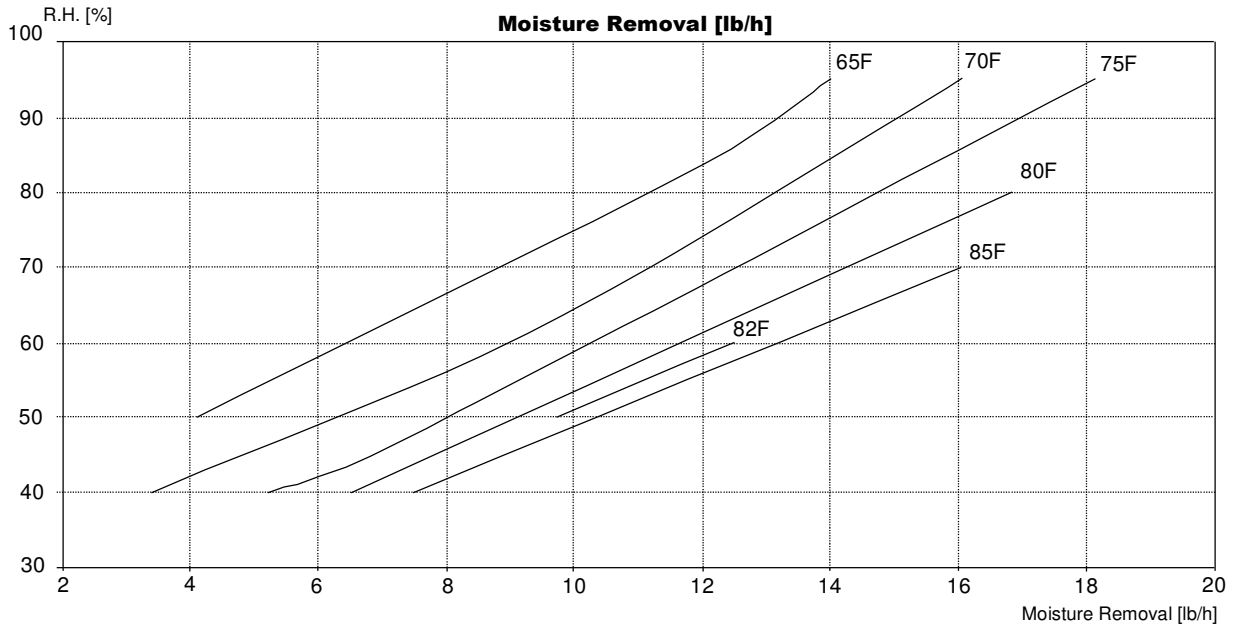

Performance	82DB / 50% R.H.	82DB / 60% R.H.	Notes
Moisture Removal, LB/HR	9.7	12.5	1
Net Sensible Cooling, MBH	14.3	12.7	2
Net Reheat, MBH	16.0	19.3	3
Water Heating, MBH (Water Heating Models Only)	30.5	32.0	4

Notes:

1. Reheat mode assuming 1050 BTU/lb
2. Cooling mode with remote condenser at 95F.
3. Defined as sum of latent and compressor input. Use dehumidifier for supplemental heat only.
4. Assuming 85F entering water temperature.
5. For conditions and data not shown contact the factory

CAUTIONS: The reheat capacity rating includes latent recovery and heat of compression. It is recommended that dehumidifier be used for supplemental heat only. The cooling capacity is based on an ambient temperature of 95°F. As outside conditions vary, so will the performance of the dehumidifier. Ratings are subject to change without notice.

DCA 900TV AIR COOLED - NON WATER HEATING DEHUMIDIFIER
DCA 900TVWH WATER HEATING ASSIST

DESIGN SPECIFICATIONS

Electrical	208/230V	208/230V	460V
Phase/Hz	1/60	3/60	3/60
Compressor B.T.U.	24,300	24,400	24,400
Compressor RLA	13.5	8.0	4.2
Compressor LRA	68	58	29
Blower Motor HP	0.5	0.5	0.5
Blower Motor FLA	4.4	2.0	1.0
Unit FLA	19.3	11.4	5.9
Maximum Fuse Size	30	17.5	10
Minimum Circuit Ampacity	22.7	13.4	7.0
Operating KW	2.77	2.69	2.69

CFM.....	950
External Static Pressure.....	0.50" H ₂ O
Refrigerant.....	R-407C (Factory Charged 18 lbs.)
Compressor Type.....	Scroll
Filter (Quantity: 2).....	18" x 25" x 1" Fiberglass
Drain Connection.....	1" Bar Drain
DCA 900TV Weight.....	570 lbs.
DCA 900TVWH Weight.....	650 lbs.
Liquid Inlet [inches O.D.] (up to 50') ¹	0.375
Hot Gas Outlet [inches O.D.] (up to 50') ¹	0.625
Water Inlet [inches O.D.].....	0.75
Water Outlet [inches O.D.].....	0.75
Water Flow G.P.M. ²	4.5
Pressure Drop (Ft. WC) ²	8.4

¹ Over 50ft contact factory

² Water Flow data based on 50% RH + Return Air 82°F and Pool Water at 85°F

STANDARD FEATURES

- MET Laboratory Safety Listed To UL 1995
- 3 Year Part Warranty
- Single Refrigeration Circuit
- Single Scroll Compressor
- Powder Coated, Galvannealed Steel Cabinet
- Low Ambient Head Pressure Control
- Remote Condenser Ready
- Rifle Tube Refrigeration Coils
- TEFC Blower Motor
- Stainless Steel Condensate Drain Pan
- Standard Microprocessor Control System (WH Models Only)
- ElectroFin Coated Coils

OPTIONAL FEATURES

- Right Side Return Air
- Horizontal Discharge (Not Field Convertible)
- Extended Surface Filters 2" & 4"
- Outdoor Make Up Air Flange Opening (Damper & Filter by Others)
- External Static Upgrade
- Water Cooled Condenser For Water Heating Or A/C Available
- Motorized Evaporator Bypass Damper
- Remote Ready Delete
- Defrost Timer Package
- Control Options
- Space Heating Options Available
- Other Options Available